

Bitumen waterproofing, BauderPIR thermal insulation,  
concrete substrate with a slope of at least 2%

---

Capping sheet (torched-on):

**Baukubit K5K**

---

First layer (cold self-adhesive):

**BauderTEC KSA DUO 35**

---

Linear drainage (optional, not shown):

**BauderPIR T LES**

---

Insulation material (bonded):

**BauderPIR FA**

---

Insulation material adhesive:

**Bauder foam adhesive**

---


Vapour barrier (torched-on):

**Bauder Super AL-E PLUS**

---

Primer:

**Burkolit V**

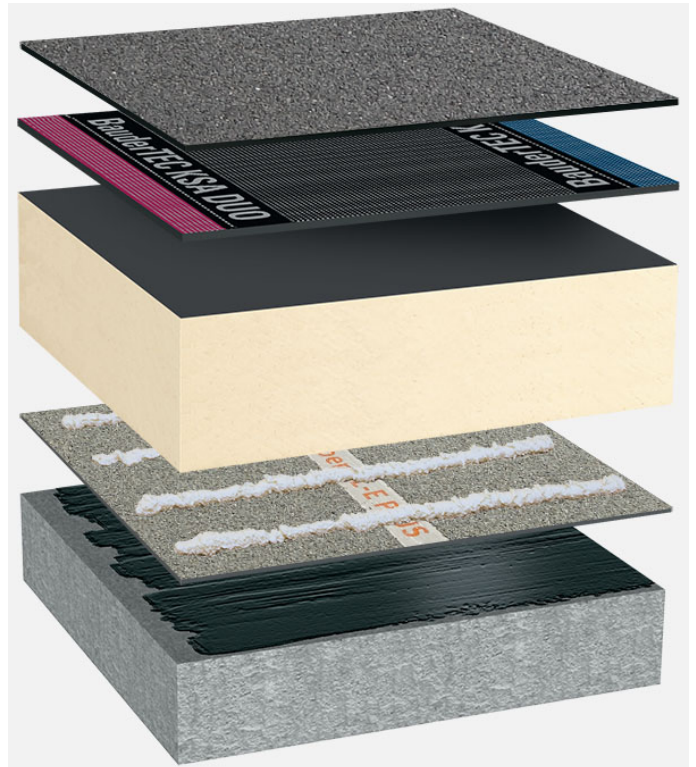

System build-up: BG\_PIR-FA\_B\_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))