

## Bitumen waterproofing, Bauder PIR Compact Roof, concrete substrate with a slope of at least 2%

---

Capping sheet (torched-on):

**BauderKARAT**

---

First layer (applied to hot-melt bitumen):

**BauderKOMPAKT ULK**

---

Insulation material (applied to hot-melt bitumen):

**BauderPIR KOMPAKT**

---

Vapour barrier (applied in hot-melt bitumen):

**BauderKOMPAKT DSK**

---


Hot-melt bitumen:

**Bauder Bitumen 100/25**

---

Primer:

**Burkolit V**

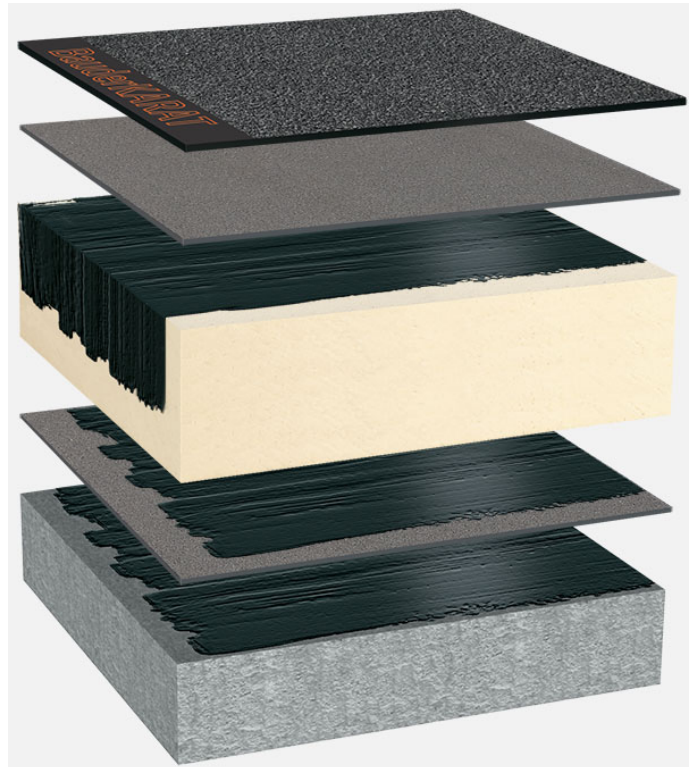

System build-up: BG\_PIR-KP\_K\_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

### Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))