

Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR thermal insulation, concrete substrate with a slope of at least 2%

---

Roof planting:

**Bauder Extensive (75 kg/m<sup>2</sup>)**

---

Capping sheet (torched-on):

**BauderSMARAGD**

---

First layer (applied to hot-melt bitumen):

**BauderKOMPAKT ULK**

---

Insulation material (applied to hot-melt bitumen):

**BauderPIR KOMPAKT**

---

Vapour barrier (applied in hot-melt bitumen):


**BauderKOMPAKT DSK**

---

Primer:

**Burkolit V**

---

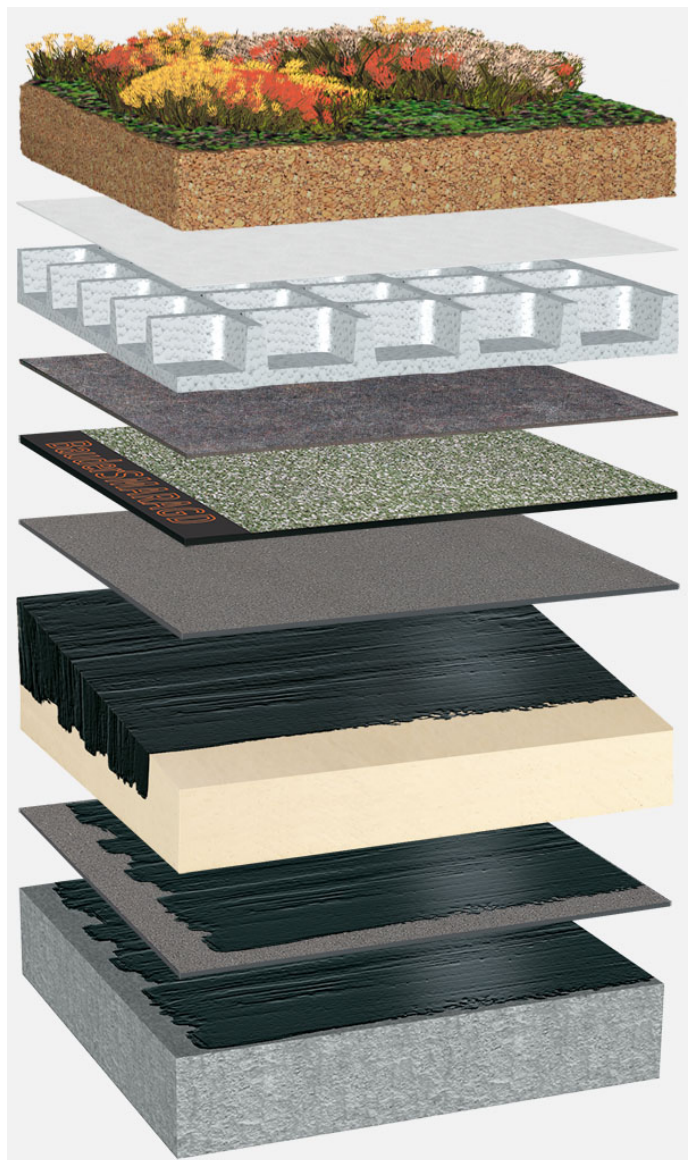

System build-up: BG\_PIR-KP\_S\_01\_G75

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))

Notes:

---

Paul Bauder GmbH & Co. KG,

Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: [info@bauder.de](mailto:info@bauder.de)