

Synthetic waterproofing, BauderPIR thermal insulation, concrete substrate with a slope of at least 2%

Capping sheet (bonded):

BauderTHERMOPLAN SK 15/18

Linear drainage (optional, not shown):

BauderPIR T LES

Insulation material (torch-welded):


BauderPIR M

Vapour barrier (torched-on):

BauderTHERM DS 2

Primer:

Burkolit V

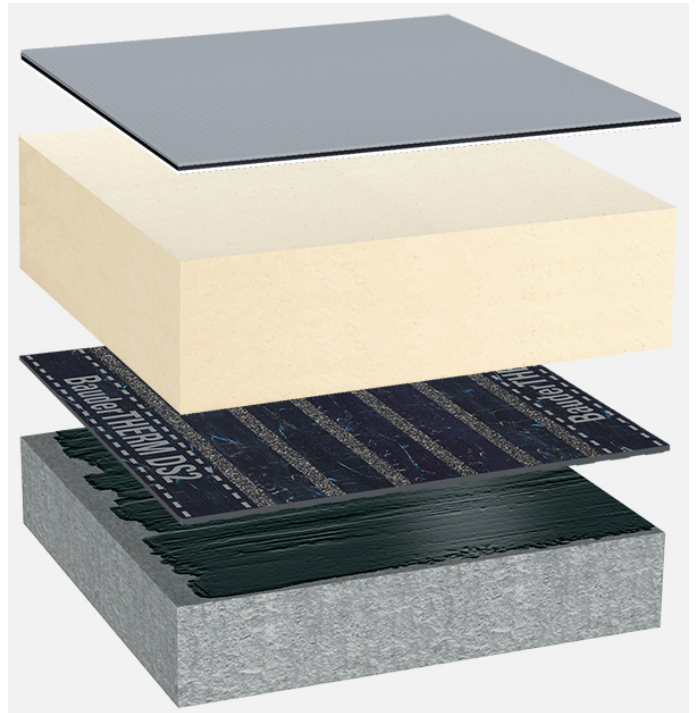

System build-up: BG_PIR-MF_SK_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)