

Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR thermal insulation, concrete substrate with a slope of at least 2%

Roof planting:

Bauder Extensive (75 kg/m²)

Capping sheet (torched-on):

BauderSMARAGD

First layer (torched-on):

BauderTHERM UL 50

Linear drainage (optional, not shown):

BauderPIR T LES

Insulation material (bonded):

BauderPIR M

Insulation material adhesive:


Bauder foam adhesive

Vapour barrier (torched-on):

BauderTHERM DS 2

Primer:

Burkolit V

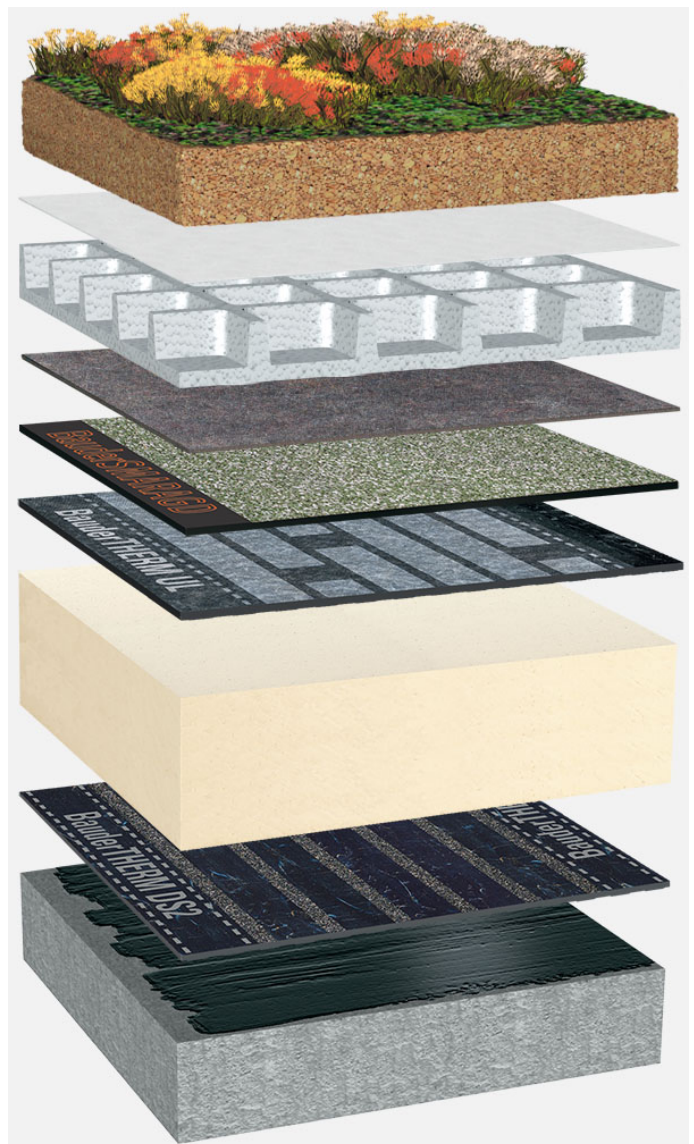

System build-up: BG_PIR-MF_S_01_G75

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)

Notes:
