

Extensive roof planting, bitumen waterproofing with root resistance, without thermal insulation, concrete substrate with a slope of at least 2%

---

Roof planting:

**Bauder Extensive (125 kg/m<sup>2</sup>)**

---

Capping sheet (torched-on):

**BauderSMARAGD**

---

First layer (applied to hot-melt bitumen):

**BauderKOMPAKT ULK**

---

Hot-melt bitumen:


**BauderFLEX adhesive compound**

---

Primer:

**Burkolit V**

---

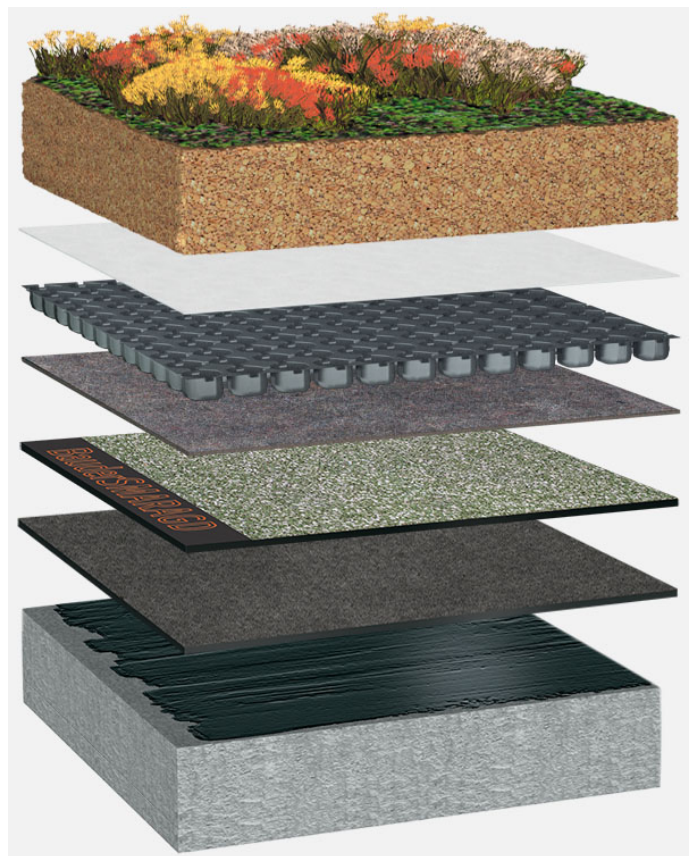

System build-up: BG\_S\_03\_G125

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))