Extensive roof planting, bitumen waterproofing with root resistance, without thermal insulation, concrete substrate with a slope of at least 2%

Roof planting:
Bauder Extensive (75 kg/m²)

Capping sheet (torched-on):
BauderSMARAGD

First layer (applied to hot-melt bitumen):
BauderKOMPAKT ULK

Hot-melt bitumen:
BauderFLEX adhesive compound

Primer:
Burkolit V

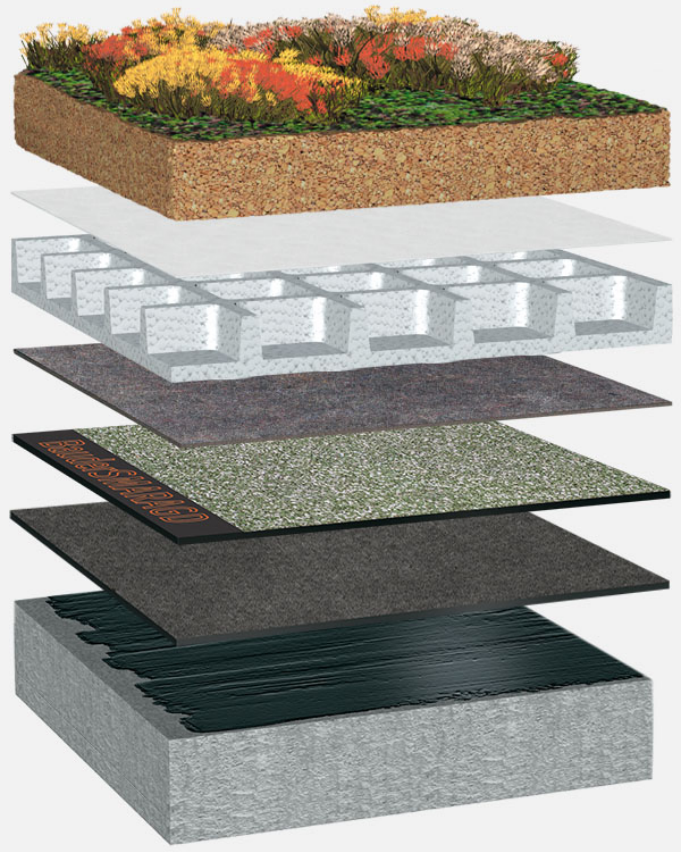

System build-up: BG_S_03_G75

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)

Paul Bauder GmbH & Co. KG,
Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: info@bauder.de