

Bitumen waterproofing, without thermal insulation,
wooden substrate with a slope of at least 2%

Capping sheet (torched-on):


Baukubit K5K

First layer (torched-on):

BauderFLEX G4E

Separating layer (mechanically secured):

BauderFLEX TA 600

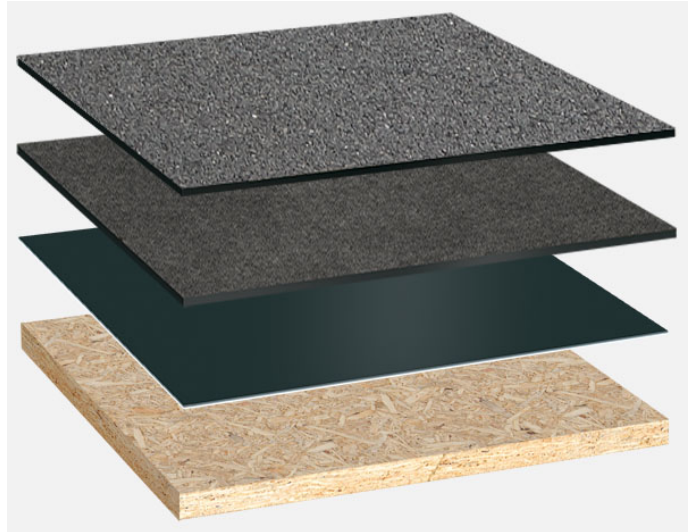

System build-up: HG_B_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes: