

Bitumen waterproofing, without thermal insulation,
wooden substrate with a slope of at least 2%

Capping sheet (torched-on):


BauderKARAT

First layer (cold self-adhesive):

BauderTEC KSA DUO 35

Separating layer (mechanically secured):

BauderFLEX TA 600

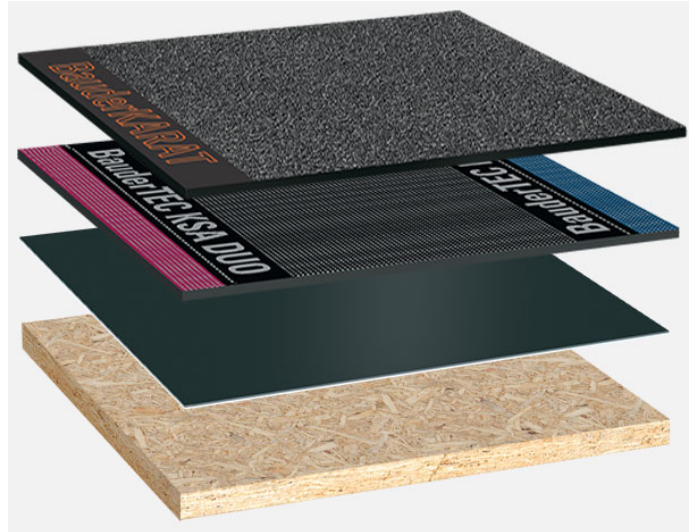

System build-up: HG_K_02

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)