

Bitumen waterproofing, mineral fibre thermal insulation,
wooden substrate with a slope of at least 2%

Capping sheet (torched-on):

BauderKARAT

First layer (torched-on):

BauderTHERM UL 50

Linear drainage (optional, not shown):


LES mineral fibre

Insulation material (bonded):

**Mineral fibre insulation,
laminated**

Vapour barrier (mechanically secured):

BauderTEC KSD Mica

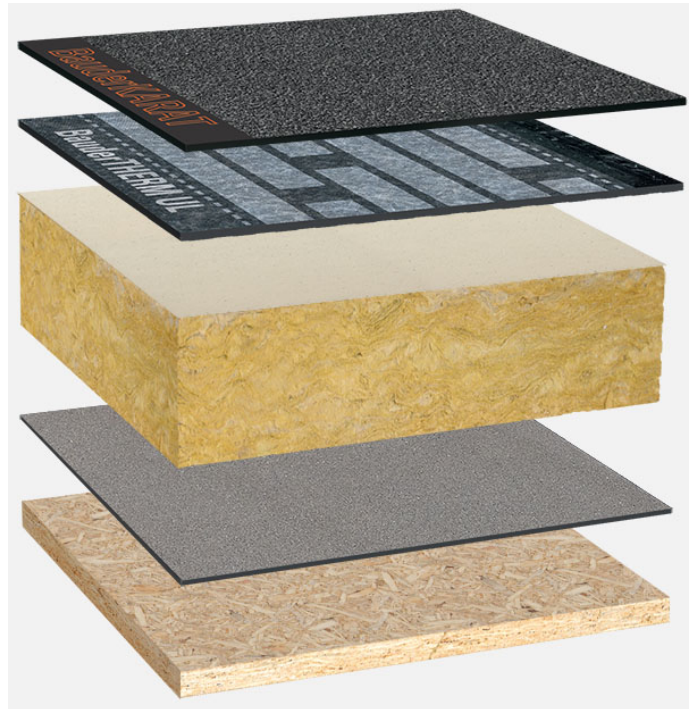

System build-up: HG_MIFA-P_K_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)