

## Bitumen waterproofing, BauderPIR thermal insulation, wooden substrate with a slope of at least 2%

---

Capping sheet (torched-on):

**BauderKARAT**

---

First layer (torched-on):

**BauderTHERM UL 50**

---

Linear drainage (optional, not shown):

**BauderPIR T LES**

---


Insulation material (torch-welded):

**BauderPIR M**

---

Vapour barrier (mechanically secured):

**BauderTHERM DS 1 DUO**

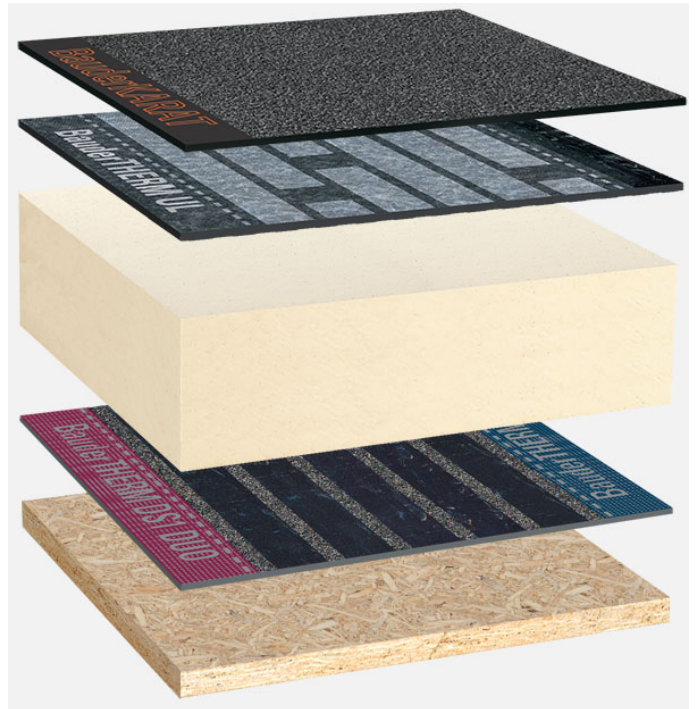

System build-up: HG\_PIR-MF\_K\_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))