

## Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR tapered insulation, wooden substrate

---

Roof planting:

**Bauder Extensive (125 kg/m<sup>2</sup>)**

---

Capping sheet (torched-on):

**BauderSMARAGD**

---

First layer (torched-on):

**BauderTHERM UL 50**

---

Linear drainage (optional, not shown):

**BauderPIR T LES**

---

Insulation material (bonded):

**BauderPIR T (Tapered)**

---

Insulation material (bonded):

**BauderPIR FA**

---

Insulation material adhesive:

**Bauder foam adhesive**

---

Vapour barrier (torched-on):


**BauderFLEX DNA**

---

Separating layer (mechanically secured):

**BauderFLEX TA 600**

---

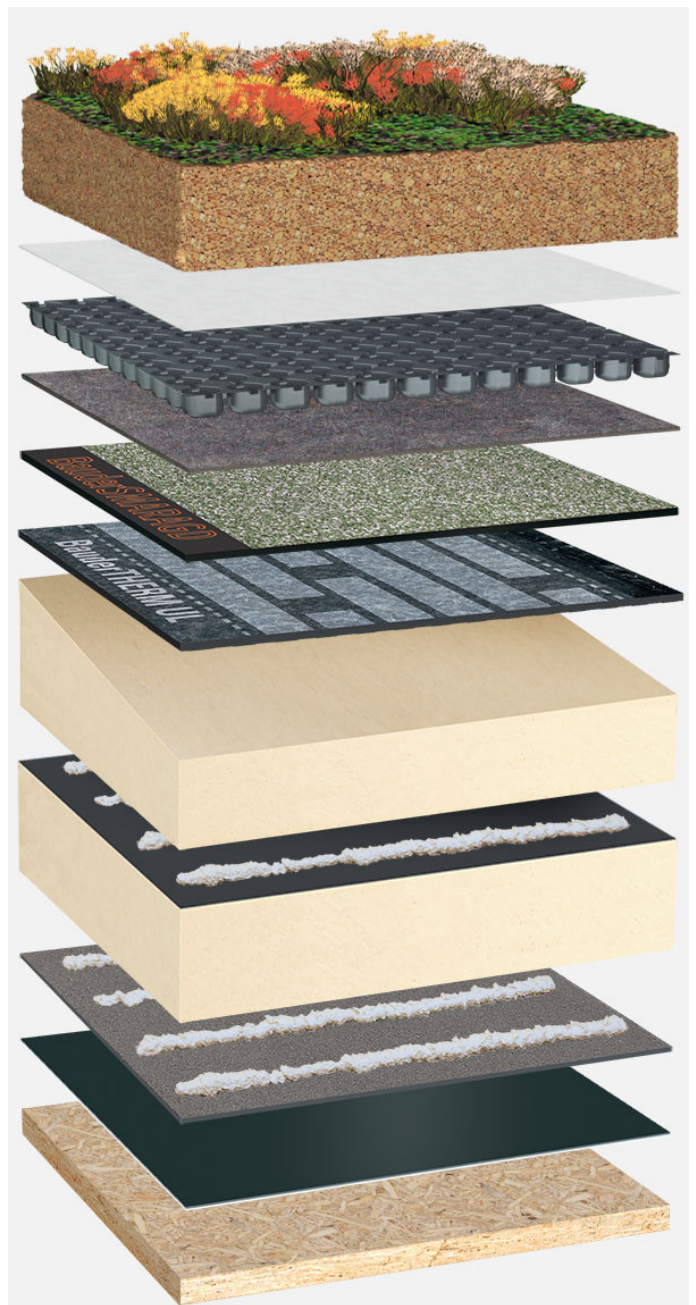

System build-up: HP\_PIR-FA\_PIR-TG\_S\_01\_G125

Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))

---

Paul Bauder GmbH & Co. KG,  
Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: [info@bauder.de](mailto:info@bauder.de)