

Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR tapered insulation, wooden substrate

Roof planting:

Bauder Extensive (125 kg/m<sup>2</sup>)

Capping sheet (torched-on):

**BauderPLANT E** 

First layer (torched-on):

BauderTHERM UL 50

Linear drainage (optional, not shown):

BauderPIR T LES

Insulation material (bonded):

**BauderPIR T (Tapered)** 

Insulation material adhesive:


**Bauder foam adhesive** 

Vapour barrier (torched-on):

**BauderFLEX DNA** 

Separating layer (mechanically secured):

BauderFLEX TA 600

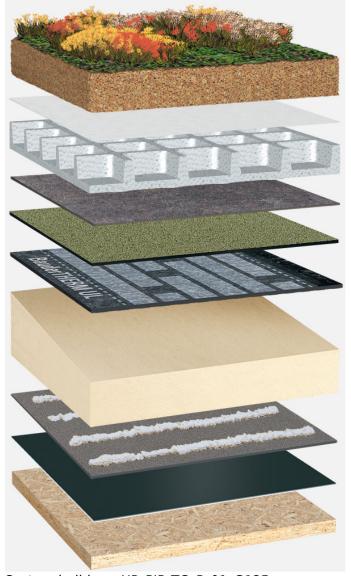

System build-up: HP PIR-TG P 01 G125

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu) Notes:

Paul Bauder GmbH & Co. KG.

Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: info@bauder.de