

Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR tapered insulation, wooden substrate

Roof planting: Bauder Extensive (75 kg/m²)

Capping sheet (torched-on):

BauderPLANT E

First layer (torched-on): BauderTHERM UL 50

Linear drainage (optional, not shown):

BauderPIR T LES


Insulation material (bonded):

BauderPIR T (Tapered)

Insulation material adhesive: Bauder foam adhesive

Vapour barrier (torched-on): BauderFLEX DNA

Separating layer (mechanically secured): **BauderFLEX TA 600**

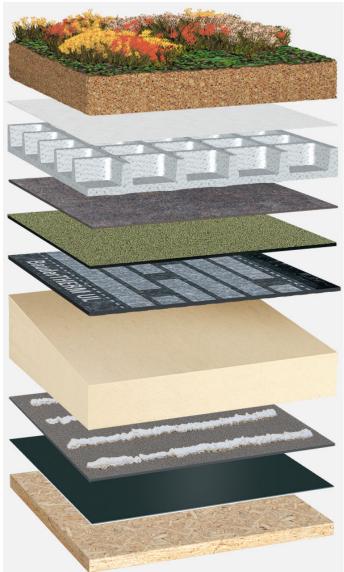

System build-up: HP_PIR-TG_P_01_G75

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu) Notes:

Paul Bauder GmbH & Co. KG, Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: info@bauder.de