

## Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR tapered insulation, wooden substrate

---

Roof planting:

**Bauder Extensive (75 kg/m<sup>2</sup>)**

---

Capping sheet (torched-on):

**BauderSMARAGD**

---

First layer (torched-on):

**BauderTHERM UL 50**

---

Linear drainage (optional, not shown):

**BauderPIR T LES**

---

Insulation material (bonded):

**BauderPIR T (Tapered)**

---

Insulation material adhesive:

**Bauder foam adhesive**

---

Vapour barrier (torched-on):


**BauderFLEX DNA**

---

Separating layer (mechanically secured):

**BauderFLEX TA 600**

---

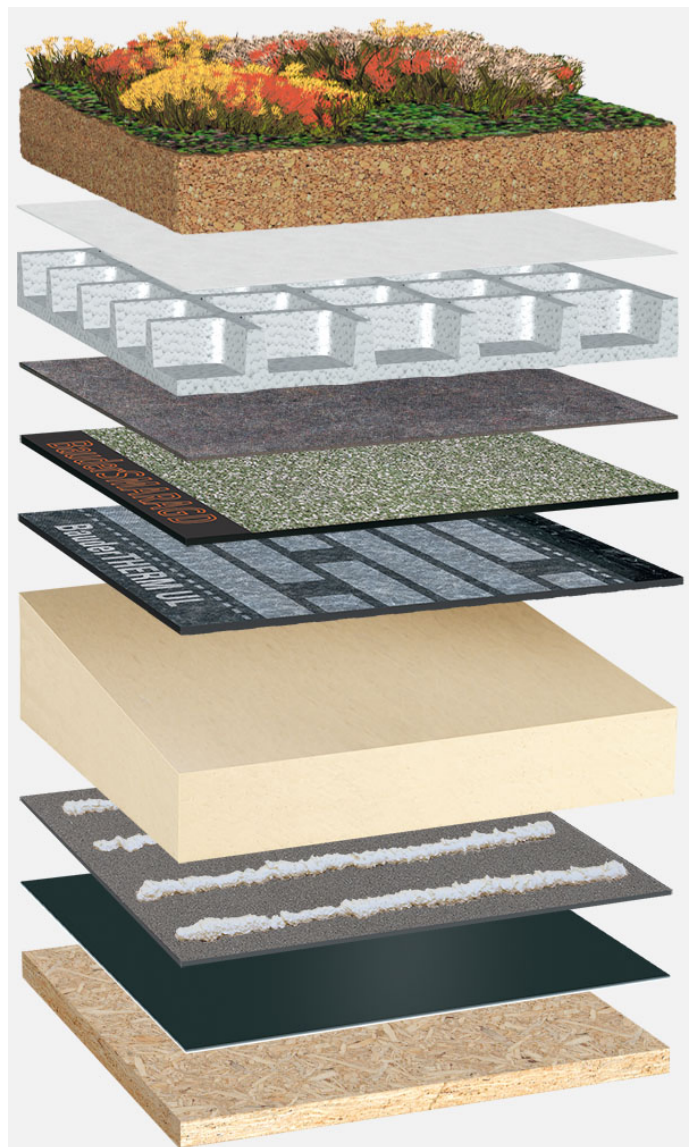

System build-up: HP\_PIR-TG\_S\_01\_G75

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))

Notes:

---