

## Bitumen waterproofing, mineral fibre thermal insulation, lightweight industrial roof with a slope of at least 2%

---

Capping sheet (torched-on):

**BauderKARAT**

---

First layer (mechanically secured):

**BauderTEC KSA DUO 35**

---


Insulation material (mechanically secured):

**Mineral fibre insulation**

---

Vapour barrier (cold self-adhesive):

**BauderTEC DBR**

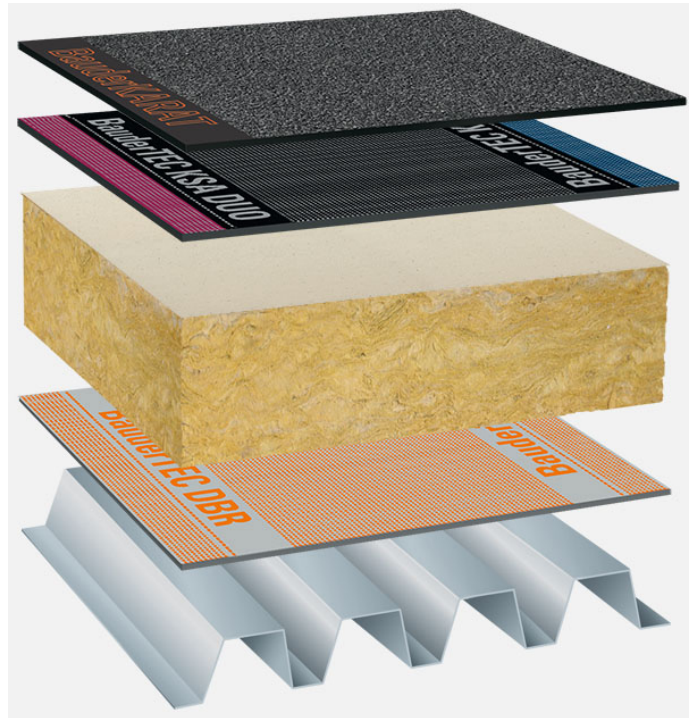

System build-up: IG\_MIFA-P\_K\_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

### Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))