

Bitumen waterproofing, mineral fibre thermal insulation,
lightweight industrial roof with a slope of at least 2%

Capping sheet (torched-on):

BauderKARAT

First layer (mechanically secured):


BauderTEC KSA DUO 35

Insulation material (mechanically secured):

Mineral fibre insulation

Vapour barrier (cold self-adhesive):

BauderTEC DBR

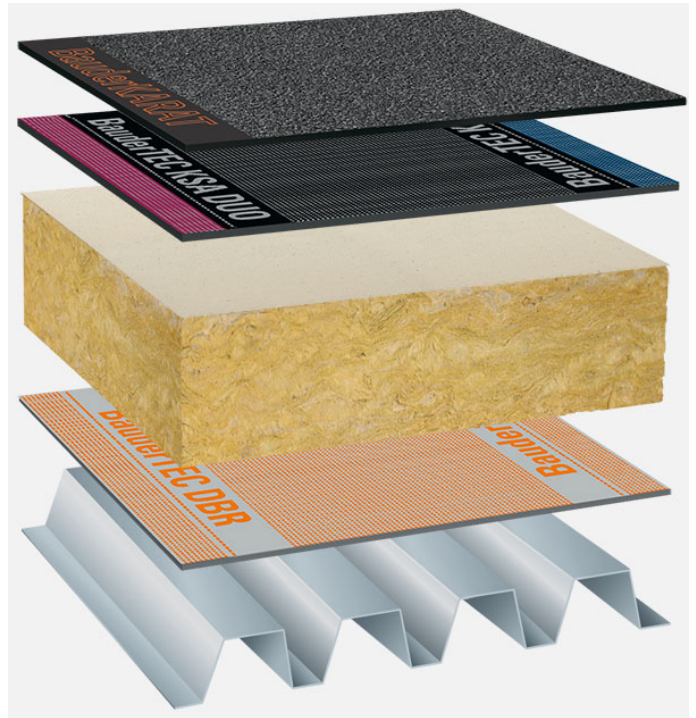

System build-up: IG_MIFA-P_K_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)