Bitumen waterproofing, BauderPIR thermal insulation, lightweight industrial roof with a slope of at least 2%

Capping sheet (torched-on):
BauderKARAT

First layer (cold self-adhesive):
BauderTEC KSA DUO 35

Insulation material (mechanically secured):
BauderPIR FA

Vapour barrier (cold self-adhesive):
BauderTEC DBR

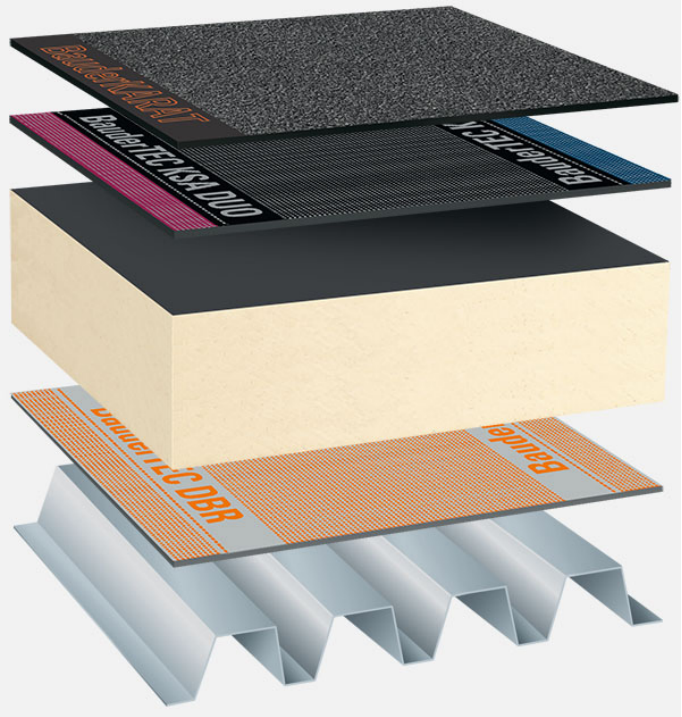

System build-up: IG_PIR-FA_K_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)

Paul Bauder GmbH & Co. KG,
Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: info@bauder.de