

Bitumen waterproofing, EPS thermal insulation,  
trapezoidal sheet metal substrate with a slope of at  
least 2%

---

Capping sheet (torched-on):

**BauderKARAT**

---

First layer (cold self-adhesive):

**BauderTEC KSA DUO 35**

---

Linear drainage (optional, not shown):

**EPS LES**

---

Insulation material (bonded):

**EPS**

---

Insulation material adhesive:


**Bauder foam adhesive**

---

Vapour barrier (cold self-adhesive):

**BauderTEC KSD Mica**

---

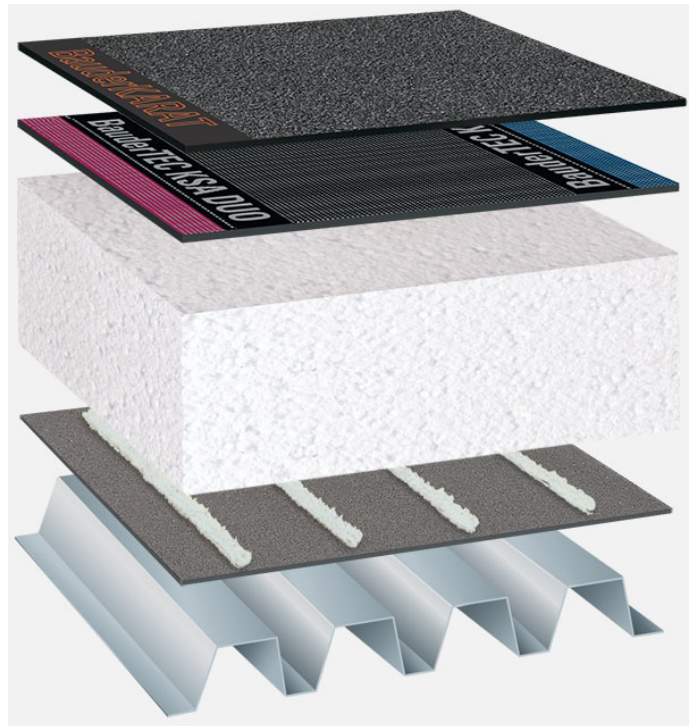

System build-up: TG\_EPS-P\_K\_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))