

Bitumen waterproofing, BauderPIR thermal insulation, trapezoidal sheet metal substrate with a slope of at least 2%

Capping sheet (torched-on):

Baukubit K5K

First layer (cold self-adhesive):

BauderTEC KSA DUO 35

Linear drainage (optional, not shown):


BauderPIR T LES

Insulation material (mechanically secured):

BauderPIR FA

Vapour barrier (cold self-adhesive):

BauderTEC KSD Mica

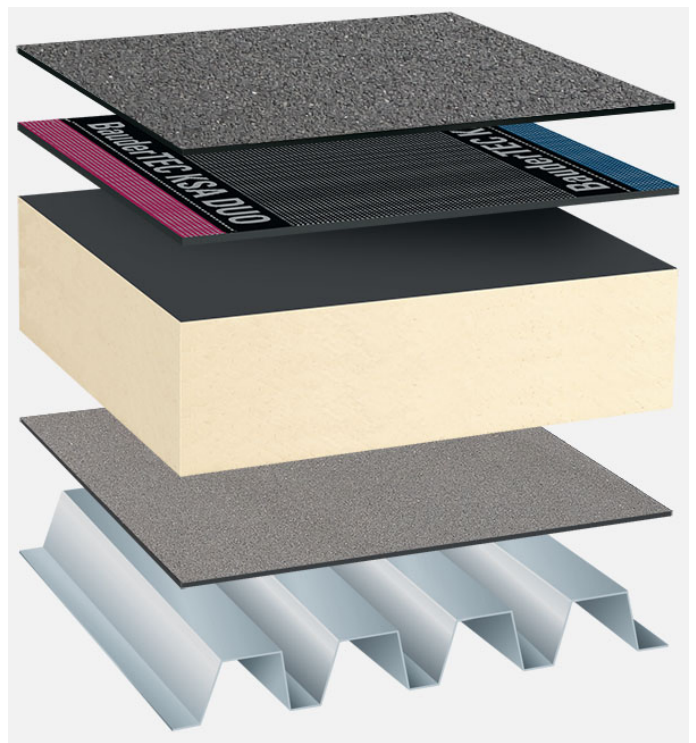

System build-up: TG_PIR-FA_B_01

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)