

Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR thermal insulation, trapezoidal sheet metal substrate with a slope of at least 2%

---

Roof planting:

**Bauder Extensive (125 kg/m<sup>2</sup>)**

---

Capping sheet (torched-on):

**BauderPLANT E**

---

First layer (cold self-adhesive):

**BauderTEC KSA DUO 35**

---

Linear drainage (optional, not shown):

**BauderPIR T LES**

---


Insulation material (mechanically secured):

**BauderPIR FA**

---

Vapour barrier (cold self-adhesive):

**BauderTEC KSD Mica**

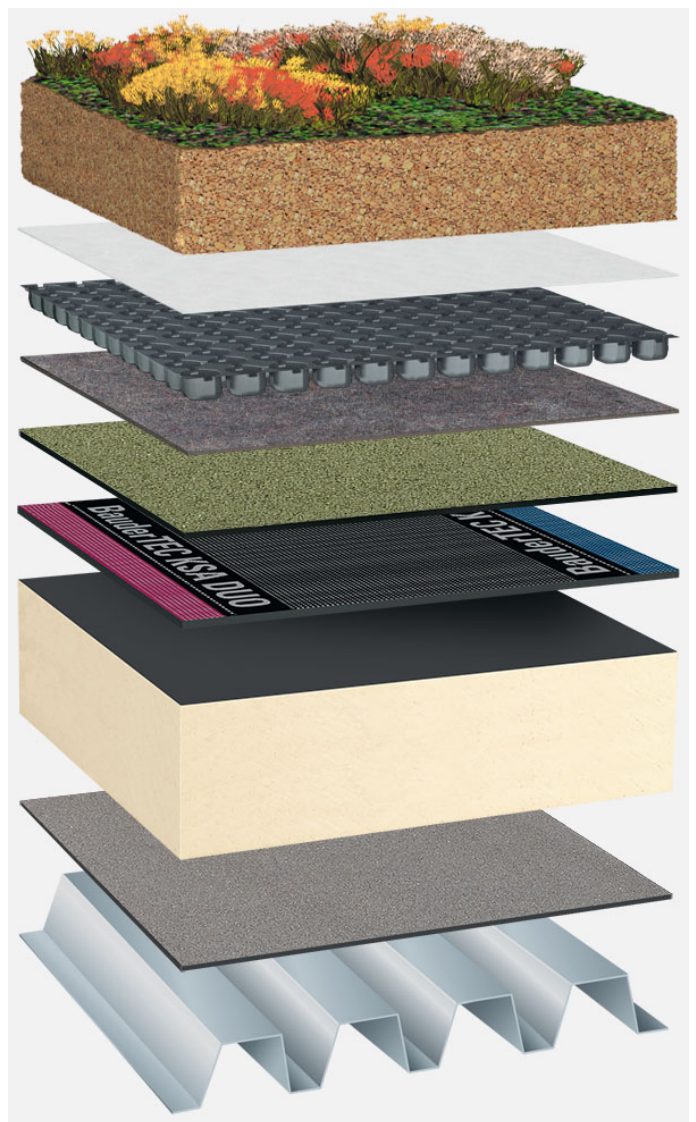

System build-up: TG\_PIR-FA\_P\_01\_G125

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Created with the Bauder Flat Roof Navigator ([www.roof-navigator.eu](http://www.roof-navigator.eu))

---

Notes:

Paul Bauder GmbH & Co. KG,

Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: [info@bauder.de](mailto:info@bauder.de)