

Extensive roof planting, bitumen waterproofing with root resistance, BauderPIR thermal insulation, trapezoidal sheet metal substrate with a slope of at least 2%

Roof planting:

Bauder Extensive (75 kg/m²)

Capping sheet (torched-on):

BauderSMARAGD

First layer (cold self-adhesive):

BauderTEC KSA DUO 35

Linear drainage (optional, not shown):


BauderPIR T LES

Insulation material (mechanically secured):

BauderPIR FA

Vapour barrier (cold self-adhesive):

BauderTEC KSD Mica

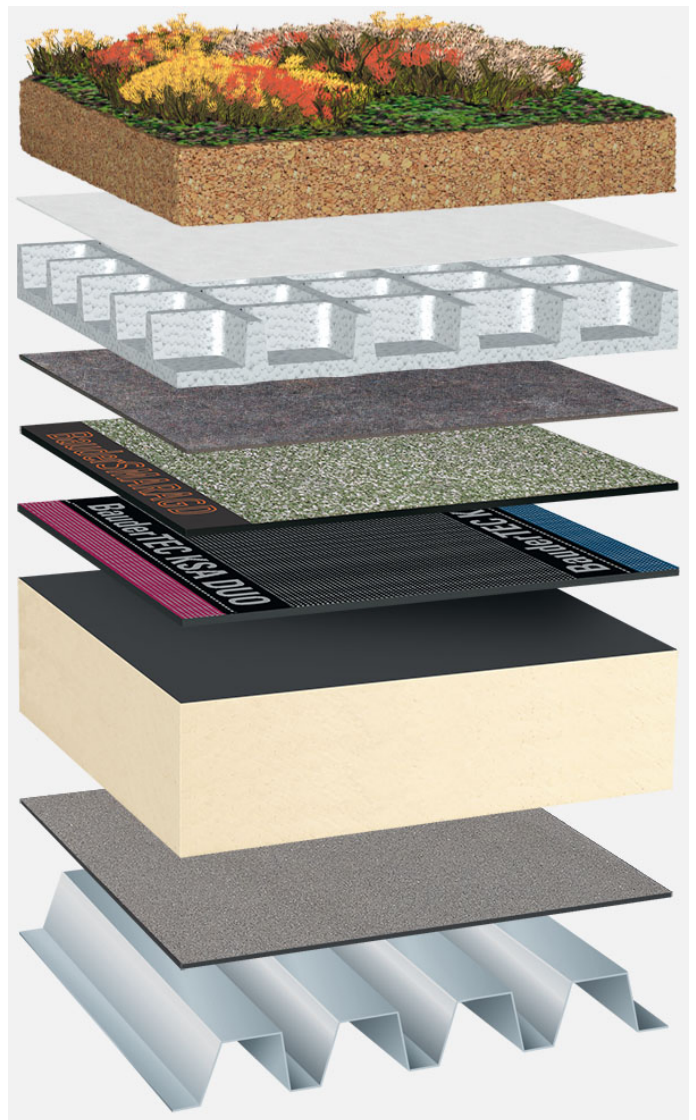

System build-up: TG_PIR-FA_S_01_G75

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder GmbH & Co. KG. Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)

Notes:

Paul Bauder GmbH & Co. KG,

Korntaler Landstraße 63, 70499 Stuttgart, Phone: + 49 (0) 7 11 /88 07-0, E-Mail: info@bauder.de