

Photovoltaic system, bitumen waterproofing, BauderPIR thermal insulation, concrete substrate with a slope of at least 2%

Photovoltaics:

BauderSOLAR UK FD

Capping sheet (torched-on):

BauderKARAT

First layer (applied to hot-melt bitumen):

BauderKOMPAKT ULK

Insulation material (applied to hot-melt bitumen):


BauderPIR KOMPAKT

Vapour barrier (applied in hot-melt bitumen):

BauderKOMPAKT DSK

Primer:

Burkolit V

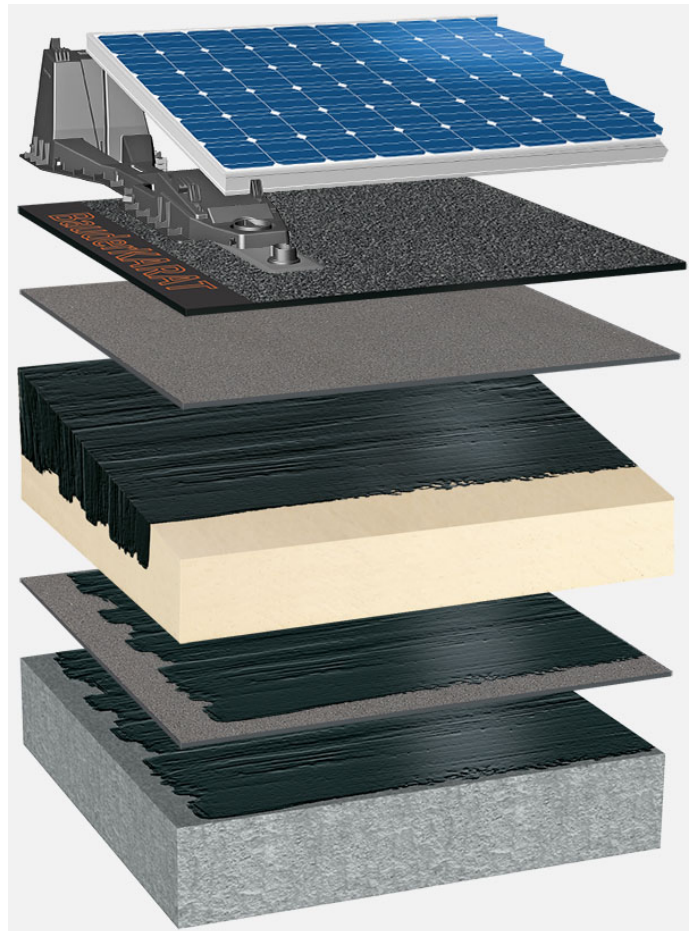

System build-up: BG_PIR-KP_K_01_PVFD

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)