

Bitumen waterproofing, BauderPIR thermal insulation,
wooden substrate with a slope of at least 2%

Capping sheet (torched-on):

BauderKARAT

First layer (cold self-adhesive):

BauderTEC KSA DUO 35

Linear drainage (optional, not shown):

BauderPIR T LES

Insulation material (bonded):

BauderPIR FA

Insulation material adhesive:


Bauder foam adhesive

Vapour barrier (torched-on):

BauderFLEX DNA

Separating layer (mechanically secured):

BauderFLEX TA 600

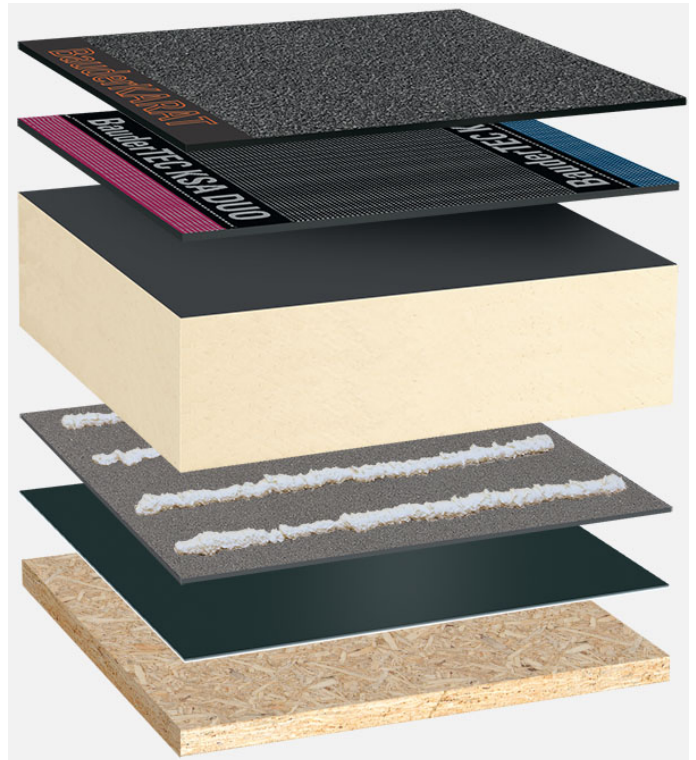

System build-up: HG_PIR-FA_K_02

The flat roof structure shown is a recommendation based on the selected parameters. Object-specific features and legal regulations must be clarified and adhered to in advance. This recommendation does not replace a consultation with a Bauder specialist consultant or Bauder Application Technology.

Notes:

Created with the Bauder Flat Roof Navigator (www.roof-navigator.eu)